

Atlas halogen ceiling light for recess mounting

IP40

Stainless steel body. Frosted glass lens. Fixing system with internal springs.

Code	Finishing	V	W	Bulb	Spare bulb	Light colour
13.435.01	Mirror-polished	12	10	G4	14.454.12; 14.454.24	☐ white



Luna LED ceiling light, recessless version

IP65

FLUSH MOUNT

Anodized aluminium body, stainless steel finish ring. Technopolymer diffuser. Hidden LEDs, even and shadeless light.

Code	Finishing	V	W	lumen	K	LED beam angle	No of LEDs	Light colour
13.410.01	Mirror-polished	12	4.8	420	3000	100°	24	☐ white




Atria halogen ceiling light for recess mounting

IP40/65

Stainless steel body. Satin-finish glass diffuser. Dual fixing system: with hidden screws or with internal stainless steel springs.

Code	Finishing	V	W	Switch	IP degree	Bulb	Spare bulb	Light colour
13.447.90	Mirror-polished	12	10	no	IP65	G4	14.454.12; 14.454.24	☐ white
13.447.91	Mirror-polished	12	10	Yes	IP40	G4	14.454.12; 14.454.24	☐ white

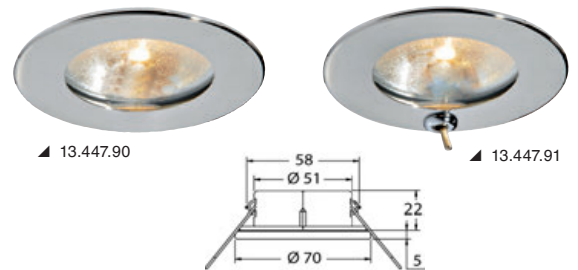


Atria LED ceiling light for recess mounting

IP40/65

Stainless steel body. Satin-finish glass diffuser. Double fixing system: with hidden screws or with internal stainless springs.

Code	Finishing	V	W	Switch	IP degree	lumen	K	LED beam angle	No of LEDs	Light colour
13.447.01	Mirror-polished	12/24	2	no	IP65	215	3000	100°	12 LED SMD G4	☐ white
13.447.02	Mirror-polished	12/24	2	Yes	IP40	215	3000	100°	12 LED SMD G4	☐ white

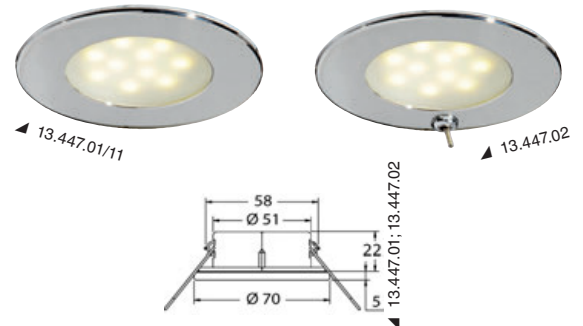

Atria II LED ceiling light for recess mounting

Stainless steel body. Satin-finish glass diffuser. Double fixing system: with hidden screws or with internal stainless springs. Dimmable with 14.482.00

Code	Finishing	V	W	Switch	IP degree	lumen	K	LED beam angle	No of LEDs	Light colour
13.447.22	Mirror-polished	12/24	8	no	IP65	560	3000	50°	1	☐ white
13.447.23	Mirror-polished	12/24	8	Yes	IP40	560	3000	50°	1	☐ white



Aruba reduced recess fit LED ceiling light

IP56

AISI 316

Technopolymer body and polished AISI316 stainless steel finishing ring. Polycarbonate opal lens. Mounting with stainless steel springs (no screws).

Code	Finishing	V	W	Switch	lumen	K	LED beam angle	No of LEDs	Light colour	mm
13.444.01	SS	12/24	3	no	193	3000	120°	14	☐ white	Ø 72.3 x 21.8
13.444.02	SS	12/24	3	Touch	193	3000	120°	14	☐ white	Ø 72.3 x 21.8
13.444.11	SS	12/24	3	no	193	3000	120°	14	☐ white	72.4 x 72.4 x 21.8
13.444.12	SS	12/24	3	Touch	193	3000	120°	14	☐ white	72.4 x 72.4 x 21.8

