


Articulated reading LED spotlight

Flexible metal arm and tiltable lamp. Switches from white to red light with a simple touch.

Code	Finishing	V	W	Switch	lumen	No of LEDs	Arm mm	Light colour
13.239.24	Black	12	1.3	Yes	70	6 SMD LEDs	330	White + night red
13.239.25	Silver titanium	12	1.3	Yes	70	6 SMD LEDs	330	White + night red
13.239.26	Silver titanium	12	1.3	Yes	70	6 SMD LEDs	130	White + night red



LABCRAFT ML articulated LED spotlight for chart table

Double light through glass rotation.

Code	V	W	Switch	lumen	K	LED beam angle	Light colour	mm	
								Base	arm
13.228.11	12	0.85	Yes	72	6100-6900	115°	White + red night	35x18	460



Spotlight for cabinets

Courtesy light with automatic switching

Suitable for closets or cabinets; fitted with electrical cable and spring switch for mounting onto the door leaf, which activates the light when it opens.


Code	Finishing	V	W	Spare bulb	lumen	Base Ø mm	Overhang mm	Light colour
13.893.00	White ABS	12	4	14.250.00	50	32	37	white



Courtesy light with automatic activation and Feton 2 independent power supply.

Pressure activation (upon door opening). Suitable for cabinets, lockers, storage rooms with 1 or 2 doors. Mounting with bayonet plate or adhesive. Batteries included.

Code	Finishing	W	lumen	No of LEDs	Batteries	mm
13.851.07	Grey ABS	0.07	14/18	4	LI154 (6 pcs)	50x41x20 h


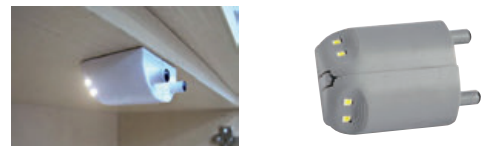


Metal light strips

Turnstripe LED track light, rotating version

High intensity LED light and built-in switch; anodized aluminium body, opaline front glass.

Code	V	W	lumen	K	LED beam angle	No of LEDs	Length mm
13.838.01	12/24	1	50	4000	120°	8	260
13.838.02	12/24	2	81	4000	105°	16	413

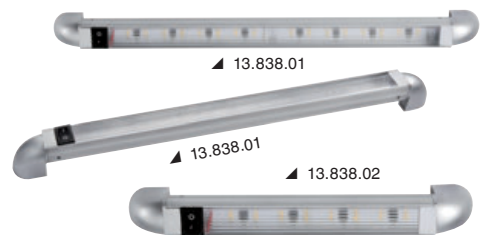

Slash 360° adjustable LED ceiling light

Adjustable 360° chromed aluminium LED strip with polycarbonate lens. Ideal for undercabinet installation. When rotated, it creates direct or diffused lights depending on its position. Easy installation with a two-adhesive tape system that centers the supports with no need of template.

Code	V	W	Switch	lumen	mm	
					outside	Overhang
13.838.12	12	2	Yes	145	303.1	45
13.838.24	24	2.2	Yes	162	303.1	45

