Single-screw hook

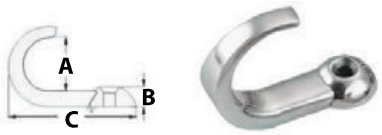

Made of polished **AISI 316 stainless steel**.

Code	⟷ AxBxC mm
38.301.08	15x5.7x35.8

High-resistance single-screw hook

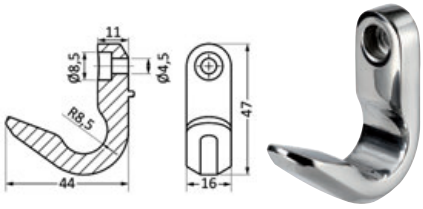

Mirror-polished **AISI316 stainless steel**.

Code	⟷ mm
38.301.14	47x16x44

High-resistance hook with hidden screws

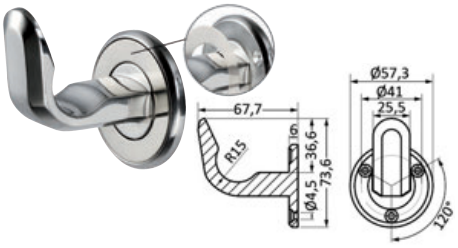

Mirror-polished **AISI316 stainless steel**. The **screws** are **hidden by a self-adhesive bezel** made of polished AISI316 stainless steel .

Code	⟷ mm
38.301.15	73.6x67.7x57.3

Multipurpose hook

Made of **chromed brass**.

Code	⟷ mm
38.178.00	43x13x14

Chromed cast hook

Made of **chromed brass**.

Code	⟷ mm
38.102.20	45x33

Moulded stainless steel hook

Made of **polished stainless steel**, designed for wall mounting.

Code	Length mm	Base mm
38.320.00	40	32x15
38.320.01	60	43x20

Ceiling hooks

Made of **polished stainless steel**.

Code	Length mm	Base mm
38.321.00	33	32x15
38.321.01	45	43x20

Pressed hooks

Made of **stainless steel**.

Code	⟷ mm	Base mm
38.102.05	32x24	32x13

Coat hook

Made of **nylon**.

Code	⟷ mm	Base mm
38.105.65	55x24	24x35

SUGATSUNE slide

Made of **stainless steel**, on sphere for drawers; perfect sliding, heavy duty; two extension parts (3/4 opening). Fitted with limit switch friction to hold the drawer in open position.

Code	Slide length mm	Sliding length mm	A mm	B mm	C mm	D mm	E mm	F mm	Capacity kg
38.272.12	304	300	155	255	98	137	247	260	24
38.272.14	350	347	225	310	-	-	290	310	23
38.272.16	397	397	265	357	-	-	358	378	21



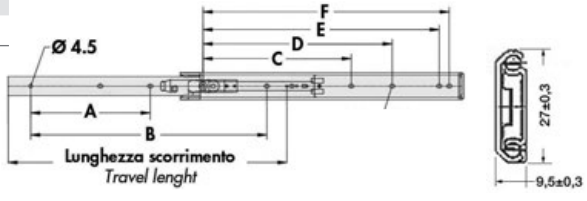

SUGATSUNE soft-close drawer slide

Stainless steel ball bearing slide. **Total** extension (3 steps).
Soft **automatic** closing: it closes automatically when it reaches 20 or 35 mm from the end of its stoke (series 300/350 mm and series 400/500 mm, respectively).
The drawer can be **removed** from its slides.

Code	length		Load capacity kgf per pair
	stroke A mm	Guide B mm	
38.273.12	275	300	20
38.273.14	353	350	25
38.273.16	404	400	25
38.273.18	455	450	30
38.273.20	505	500	35
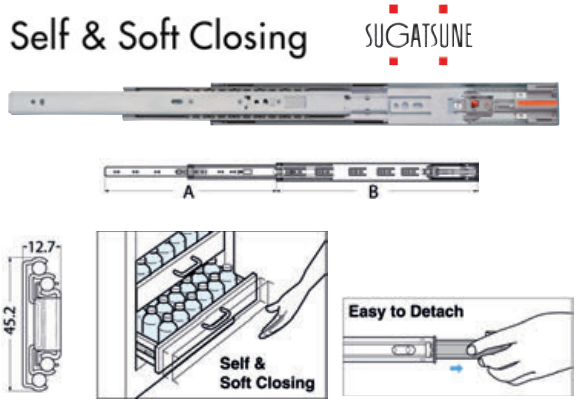
Sold in pairs.